


<b>M. McNearney</b> 4/2013							<b>Montana Fish &amp; Wildlife</b>	<b>Site Plan Segment A-B</b> Spotted Dog WMA (near Deer Lodge, MT)	SHEET: 3 of 6
DRAWN BY:	DATE:	REVISED BY:	DATE:	APPROVED BY:	DATE:				
CHECKED BY:	DATE:	APPROVED BY:	DATE:	APPROVED BY:	DATE:				





M. McNearney	4/2013				
DRAWN BY:	DATE:	REVISED BY:	DATE:	APPROVED BY:	DATE:
CHECKED BY:	DATE:	APPROVED BY:	DATE:	APPROVED BY:	DATE:








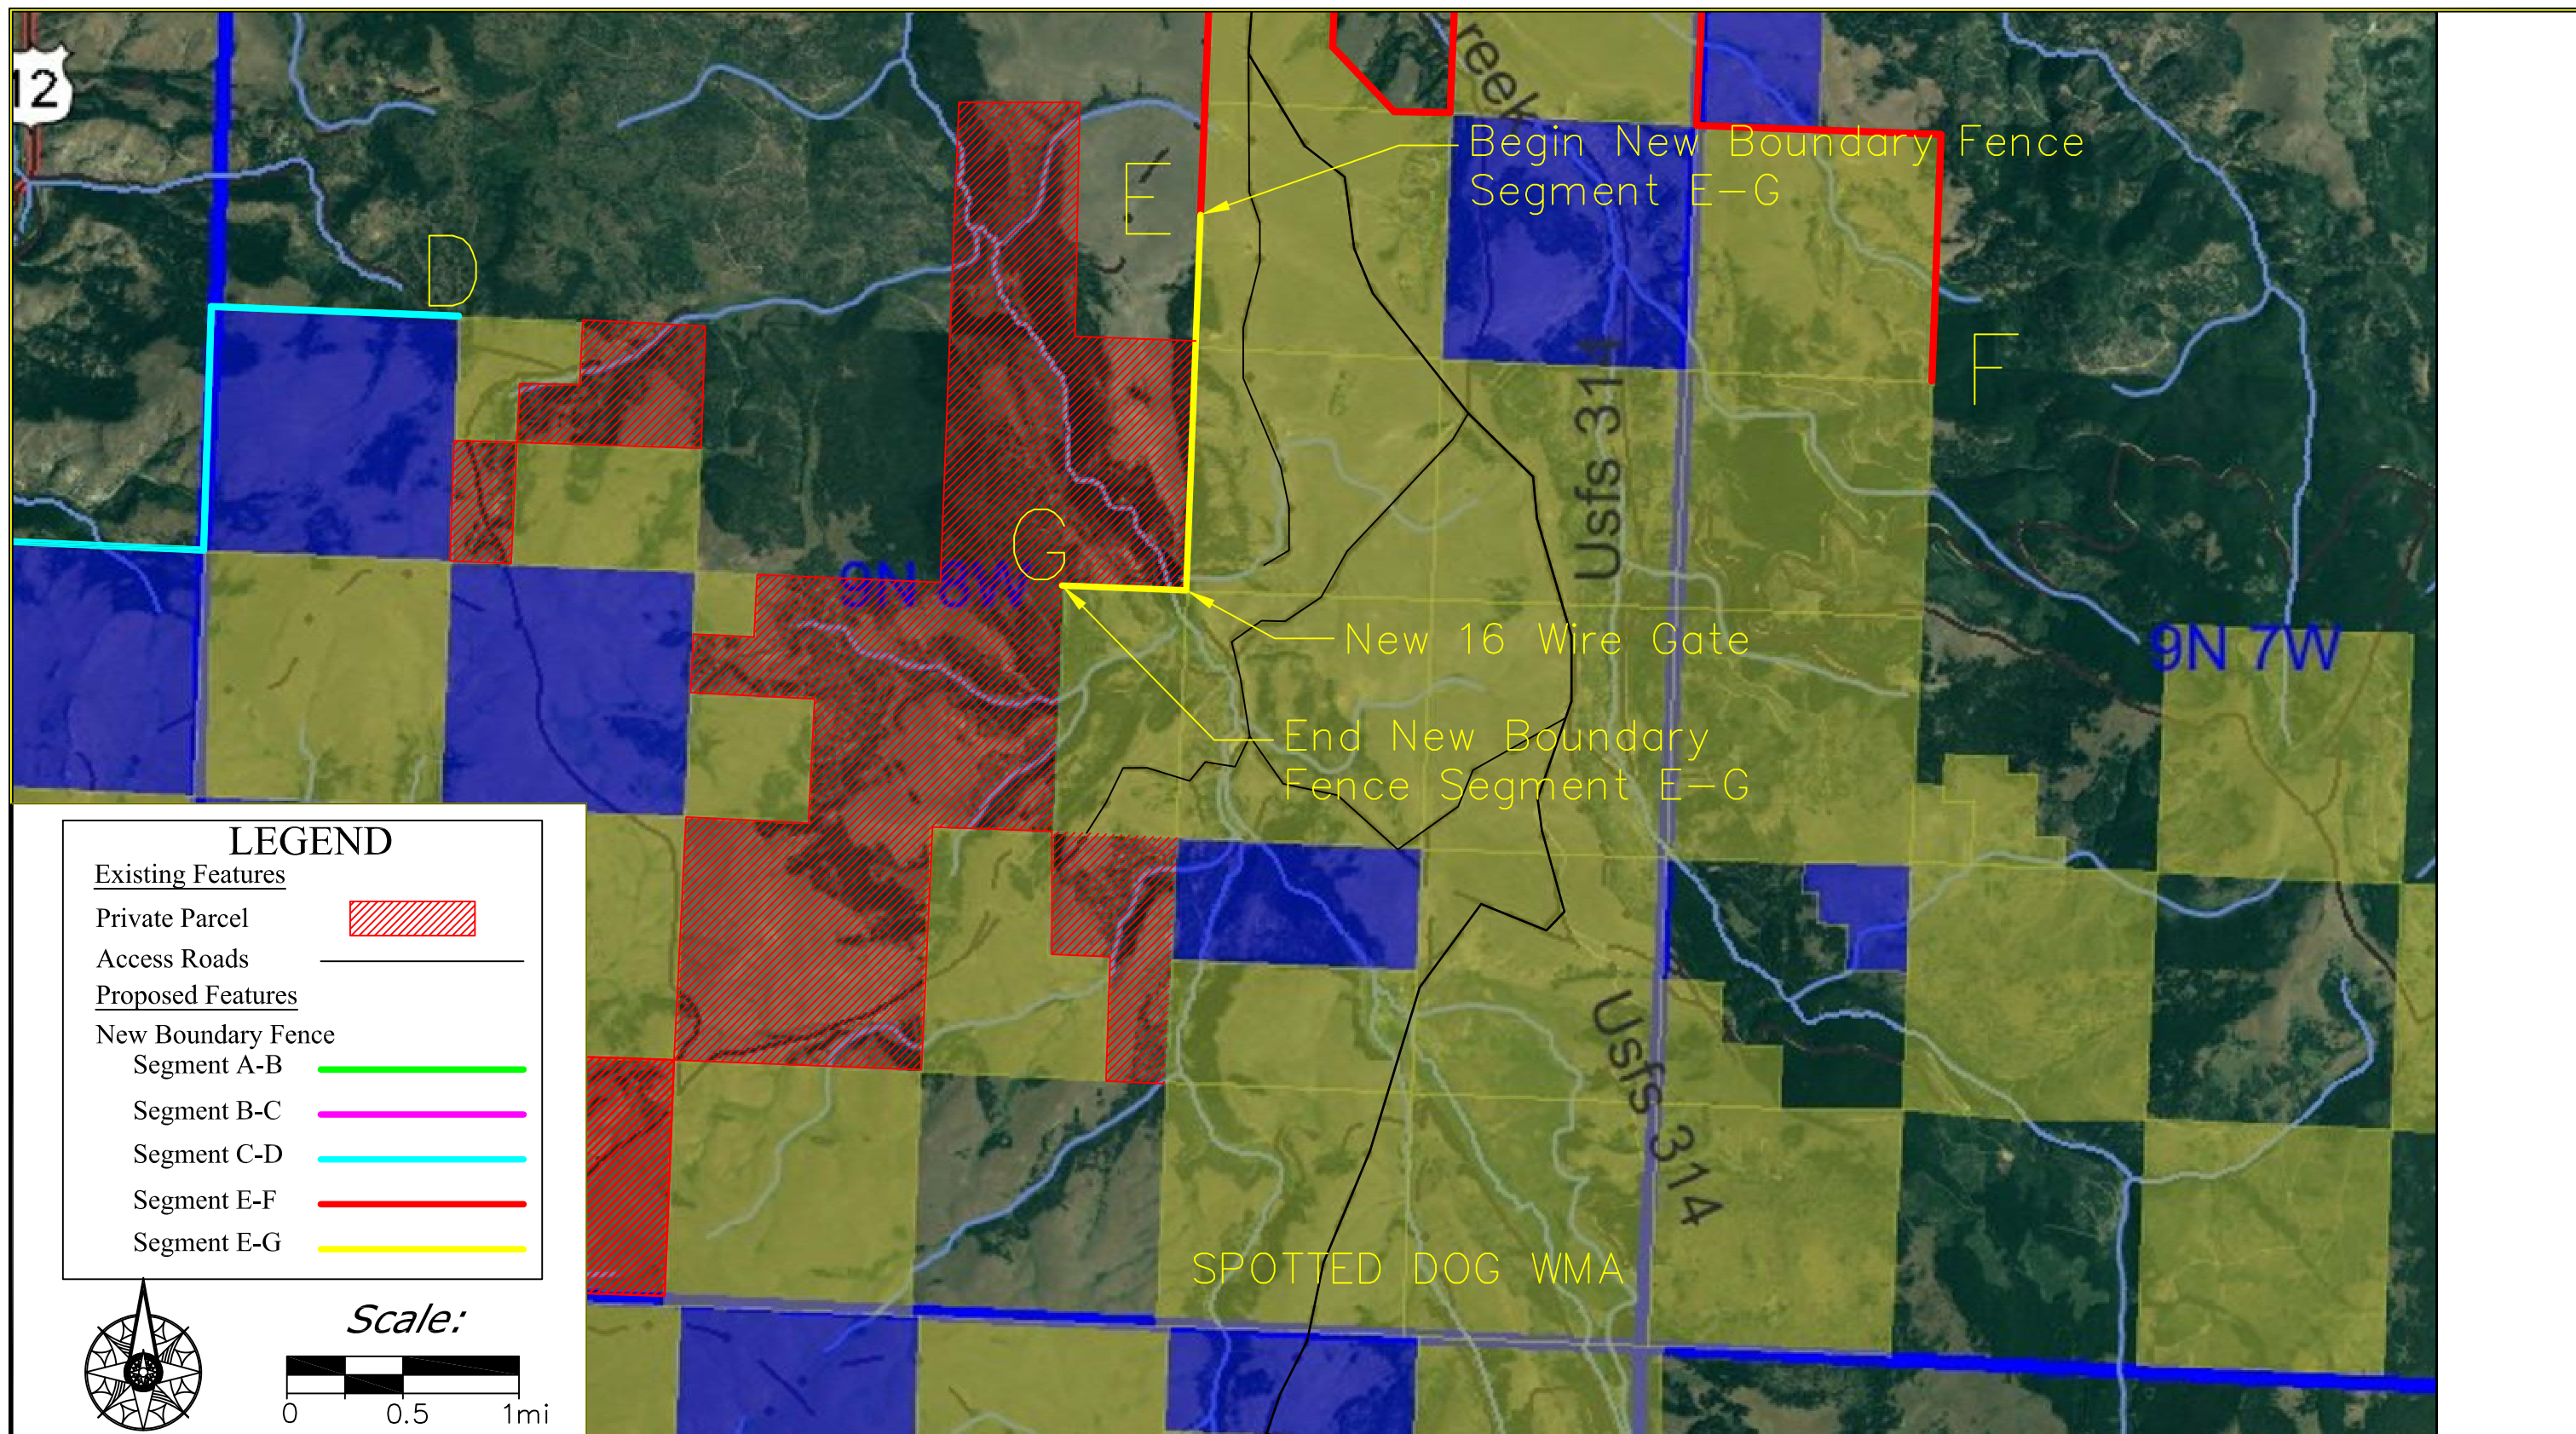


**Montana Fish,  
Wildlife & Parks**

**Site Plan Segment E-G**  
Spotted Dog WMA (near Deer Lodge, MT)


SHEET: 4  
of 6



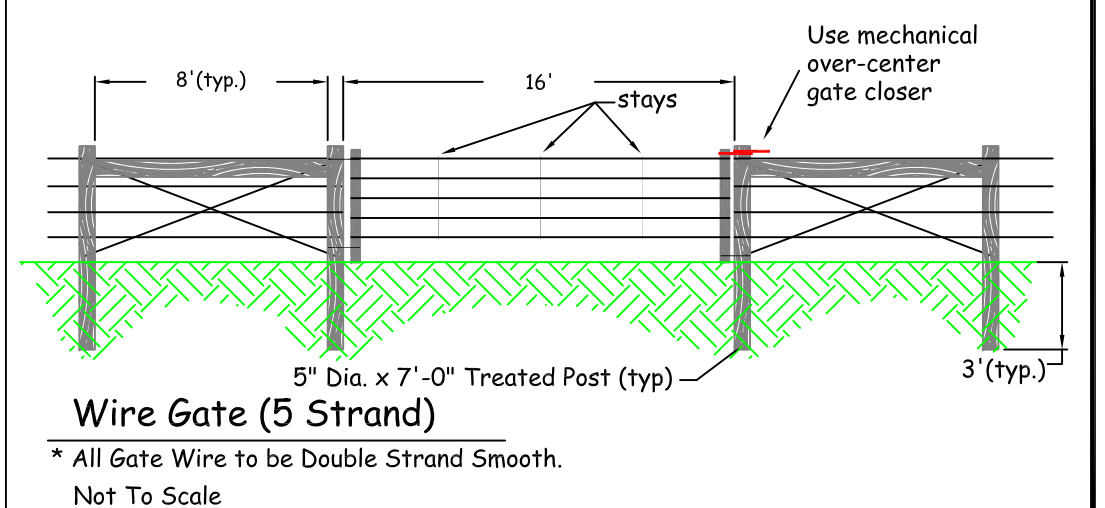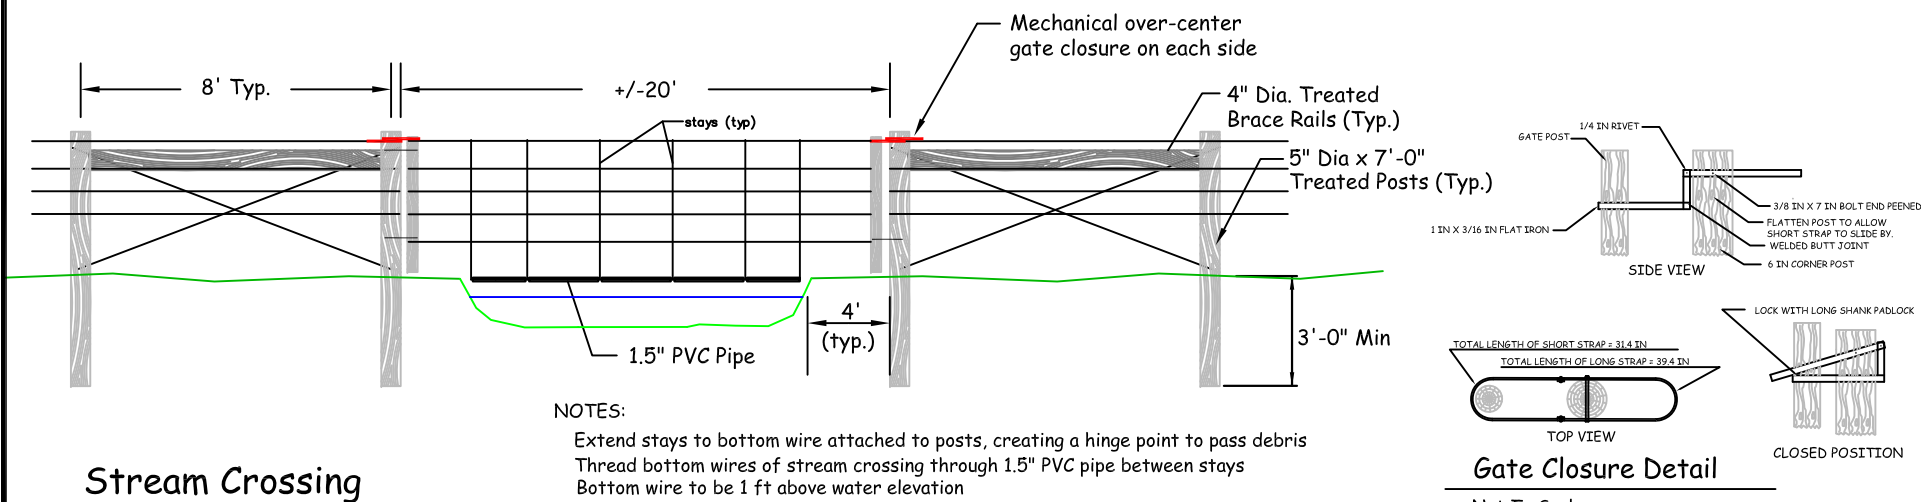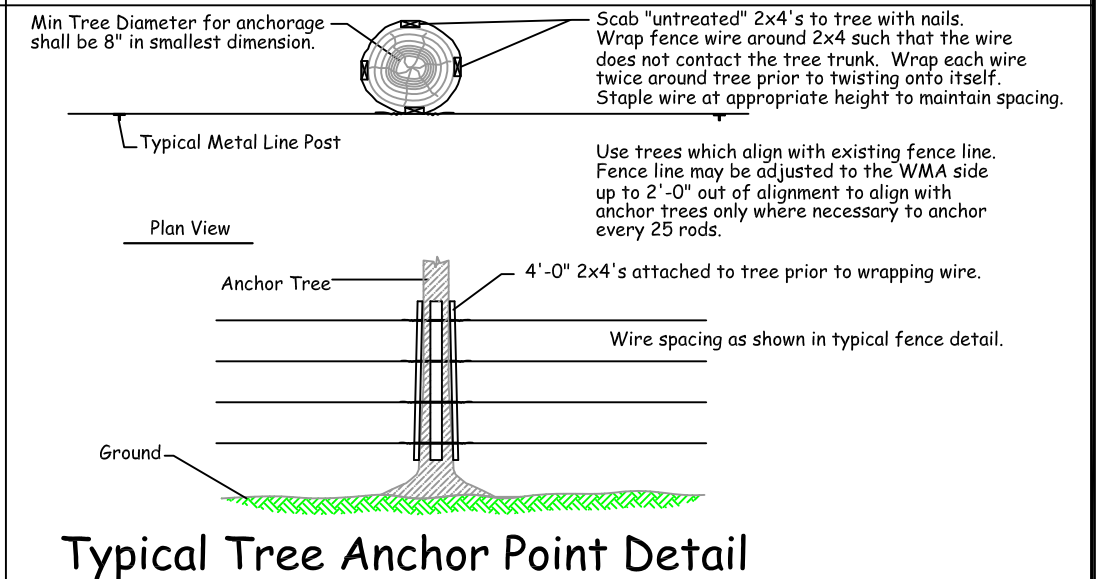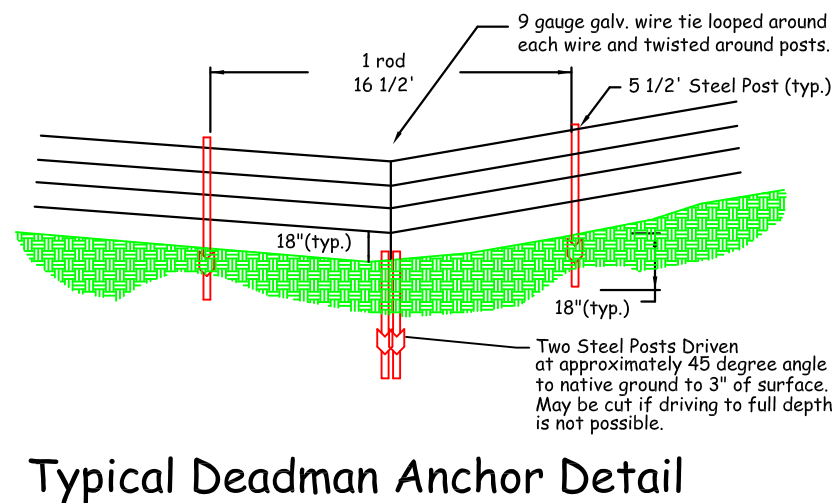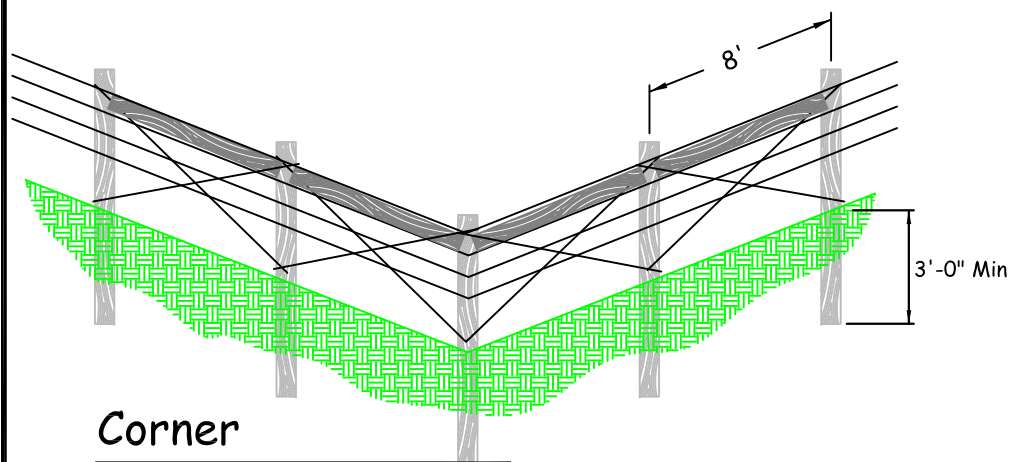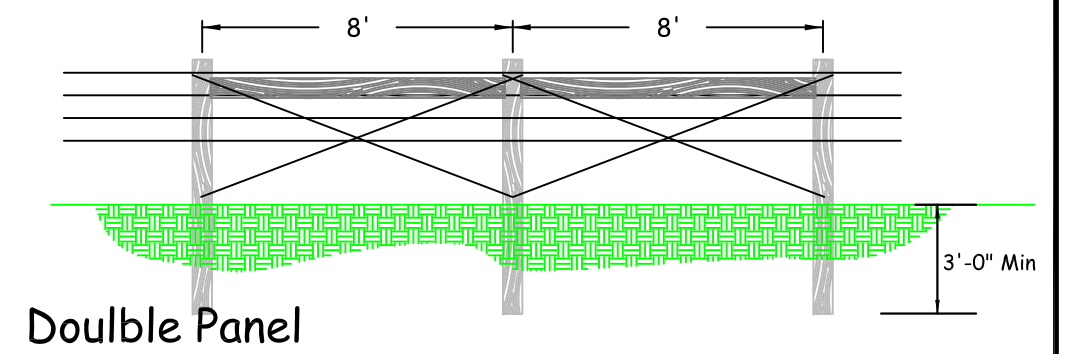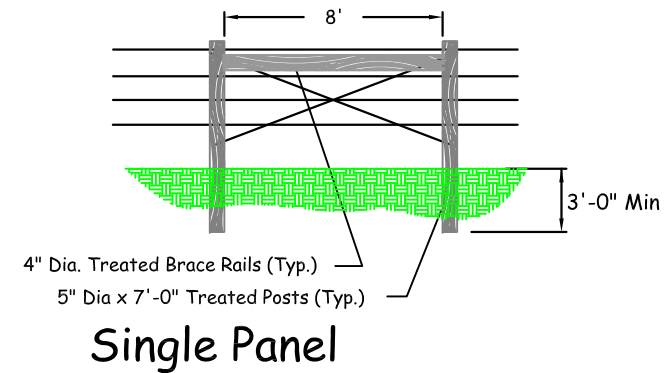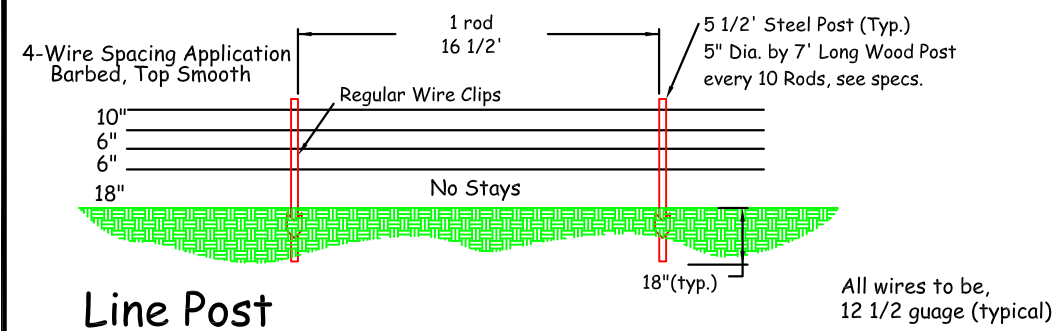

# WIRE JACKLEG FENCE - Details


(Not to Scale)

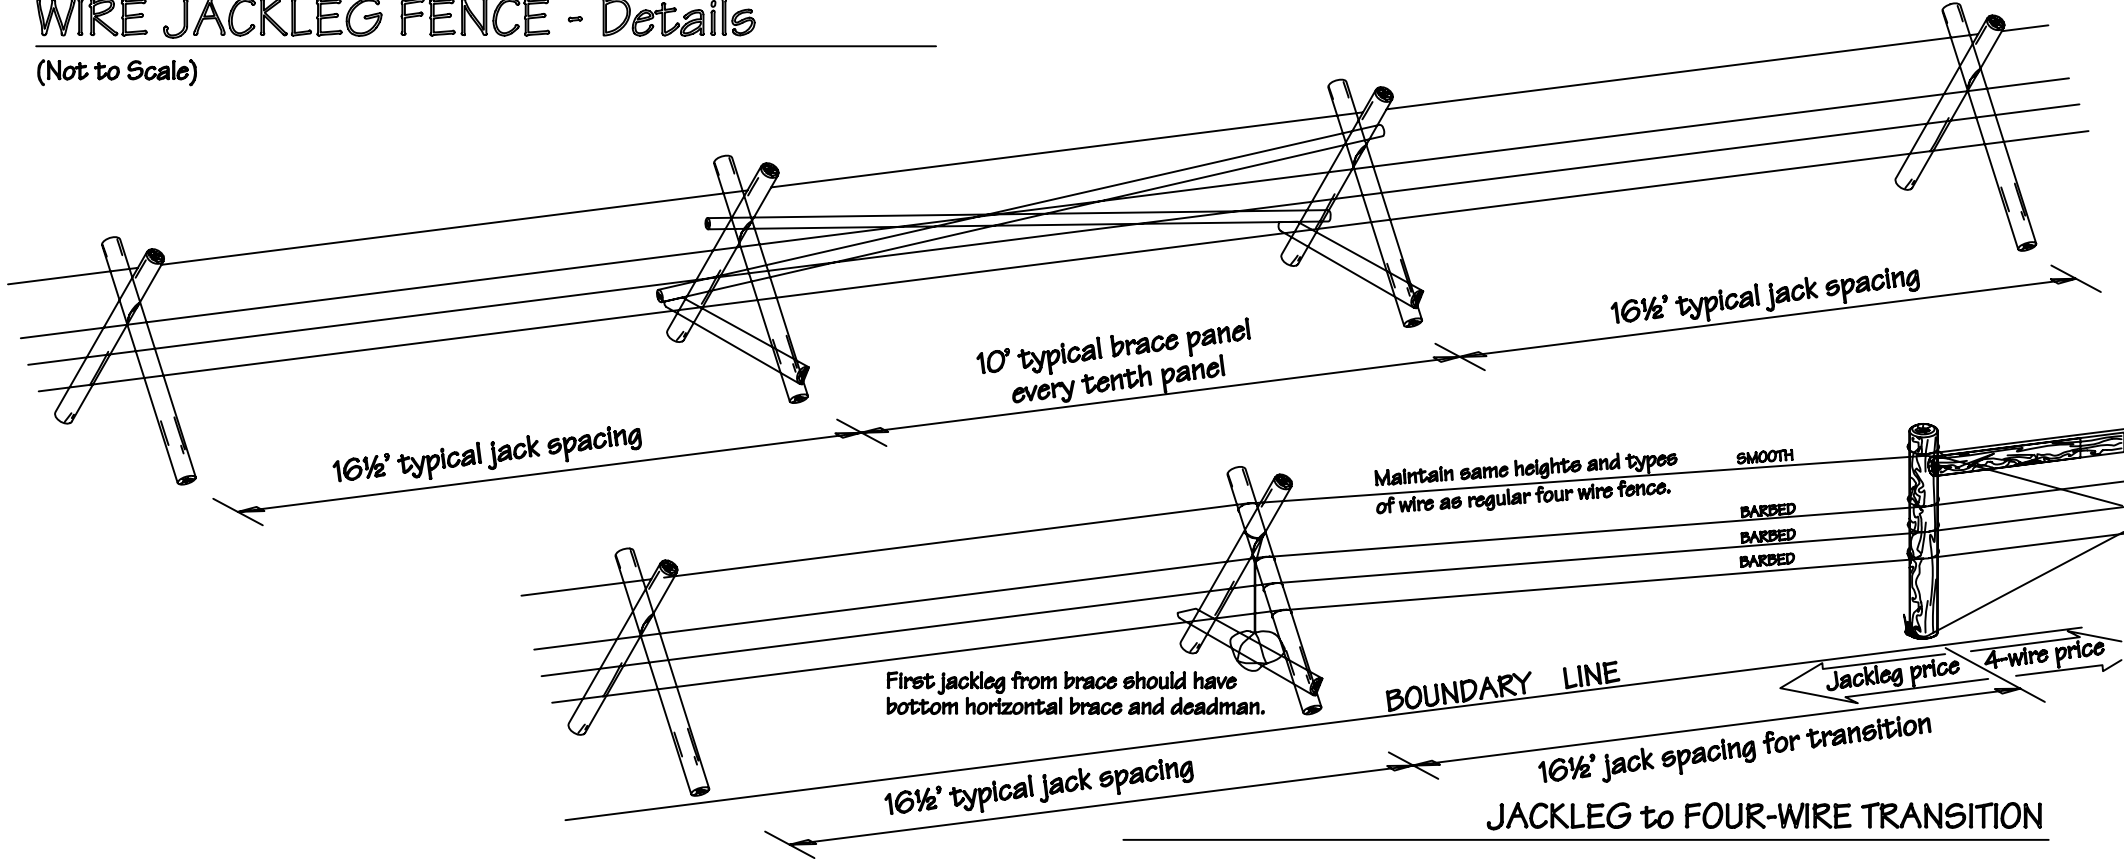

Jack posts min 5" diameter, 52" long, peeled, machine notched and butt treated per AWPA standards.


Fasten jacks together with 8" TimberLok® screws, 7" x 5/16" Ring Shank nails or approved equivalent.

Brace panel jacks shall have a notched full round post or split post at bottom to prevent jack from spreading and to add rigidity.

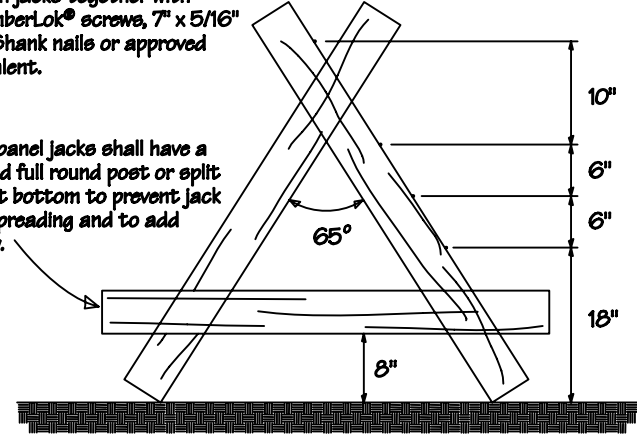


Top wire to be two strand, twisted smooth wire. Bottom three wires to be two strand twisted barbed wire. Spacing from ground up should be 18"/6"/6"/10"

Angle of fence face shall not be steeper than 10° from vertical. If face is too steep, rear post should be cut off at bottom and cut surface painted with wood preservative as per AWPA standards.

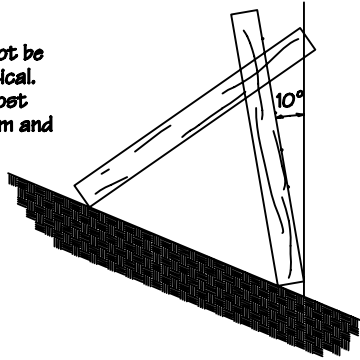

## Vehicle Panel Gate

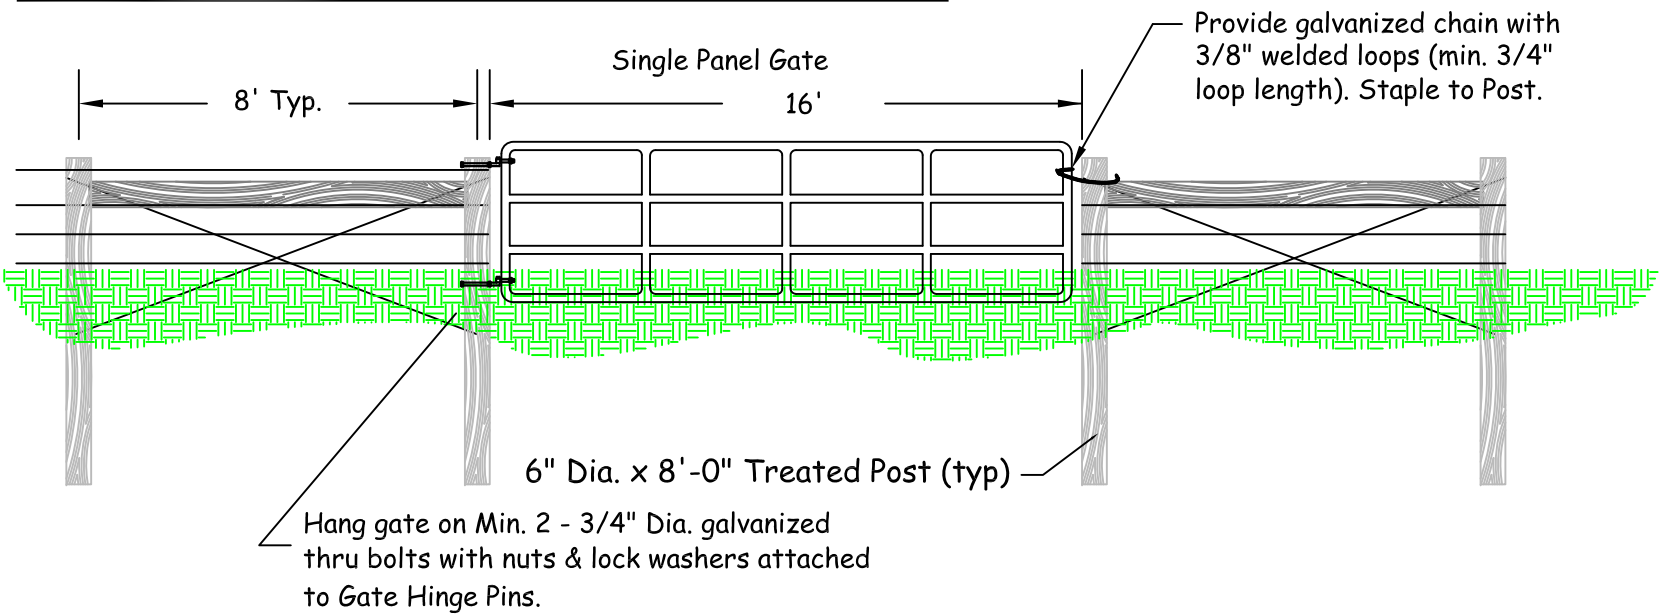

M. McNearney	4/2013				
DRAWN BY:	DATE:	REVISED BY:	DATE:	APPROVED BY:	DATE:
CHECKED BY:	DATE:	APPROVED BY:	DATE:	APPROVED BY:	DATE:



Montana Fish & Wildlife

Fencing Details  
Spotted Dog WMA (near Deer Lodge, MT)

SHEET: 6 of 6